


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	2.54	~	18	GHz
Passband IL	/	/			3.0	dB
Rejection	DC-2.34	GHz	40			dB
Passband VSWR	/	/			2.0	

Other parameters

Connector	SMA-K
Impedance	50Ω
Surface	Black baking paint
Power	5W Design assurance
Work Temp.	-40~+70°C Design assurance
Storage Temp.	-55~+85°C Design assurance

Configuration(mm)

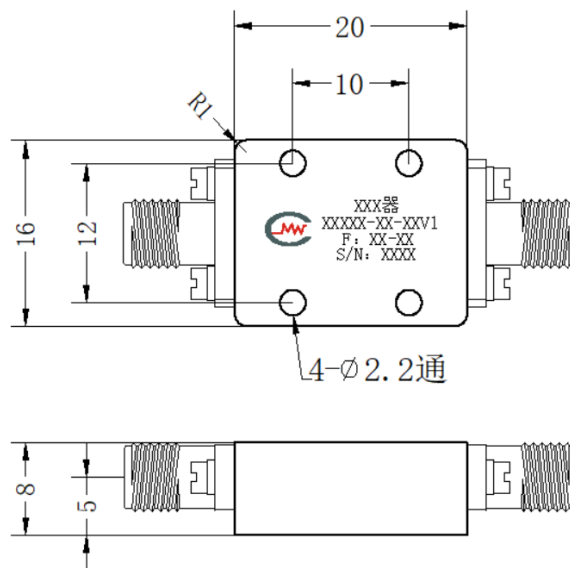

Note

- 1 Please do not wash the product in the cleaning solution.,Please do not wash the product in the cleaning solution.