

Main specifications

Parameters	Min	Typical	Max	Units
Frequency	3400	~	3800	MHz
IL			0.8	dB
Isolation	18			dB
Input VSWR			1.3	
Output VSWR			1.3	
Amplitude balance			0.5	dB
Coupling	33			dB
Directivity		12		dB


Other parameters

Power Capacity	200W Design assurance
way	5-way
Phase	Paired use of two
Impedance	50Ω
Connector	SMA-K
Surface	White
Product shell material	Aluminium
Operation Temp.	-30~+85°C Design assurance
Other	Series feed synthesizer


Port Definition

Common port	C
Dispatch Port	1, 2, 3, 4, 5
Coupling port	C1, C2

Reference picture



Configuration(mm)

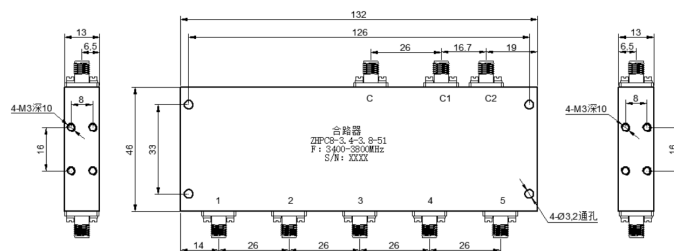

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 2 If the temperature is higher than 125°C, consult with us before ordering.