


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	950	~	1750	MHz
Passband IL	/	/			2.0	dB
Ripple	/	/			0.2	dB
Rejection	DC-0.5	GHz $\geq$	40			dBc
Rejection	2.4-2.7	GHz $\geq$	40			dBc
Rejection	9.4	GHz $\geq$	60			dBc
Passband VSWR	/	/			1.35	

Other parameters

Connector	Pin 0.5mm
Impedance	50 Ω
Surface	silver-plate
Power Capacity	2W Design assurance
Operation Temp.	-40~+70°C Design assurance
Storage Temp.	-55~+85°C Design assurance

Configuration(mm)

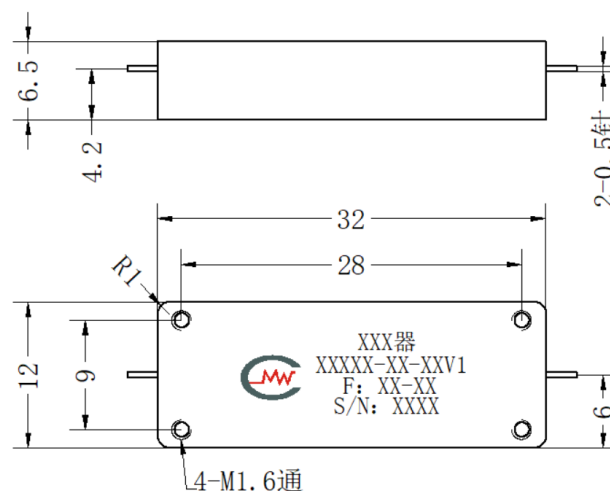

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.