


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	23	~	33	MHz
Passband IL	/	/			3.8	dB
Ripple	/	/			3.6	dB
Rejection	3	MHz $\geq$	40			dB
Rejection	53	MHz $\geq$	40			dB
Passband VSWR	/	/			1.5	

Reference picture



Configuration(mm)

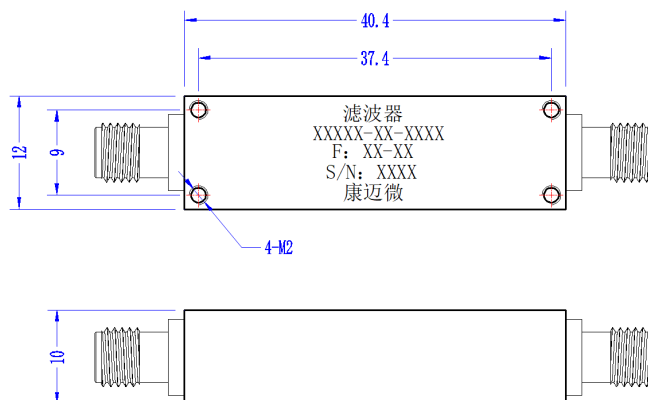

Other parameters

Connector	SMA-K
Impedance	50 Ω
Surface	silver-plate
Power Capacity	2W Design assurance
Operation Temp.	-40~+70°C Design assurance
Storage Temp.	-55~+85°C Design assurance

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.

Functional diagram

