


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	5700	~	8500	
Passband IL	/	/			2.0	dB
Rejection	DC-5000	MHz $\geq$	50			dBc
Rejection	10000-15500	MHz $\geq$	65			dBc
Passband VSWR	/	/			1.6	


Other parameters

Connector	SMA-F Detachable, Pin 0.5mm
Impedance	50 Ω
Surface	Black
Power Capacity	5W Design assurance
Product shell material	Aluminium
Delay ripple	2ns
Operation Temp.	-40~+70°C
Storage Temp.	-55~+85°C Design assurance
Other	Passband ripple 0.5dB


Typical test curve

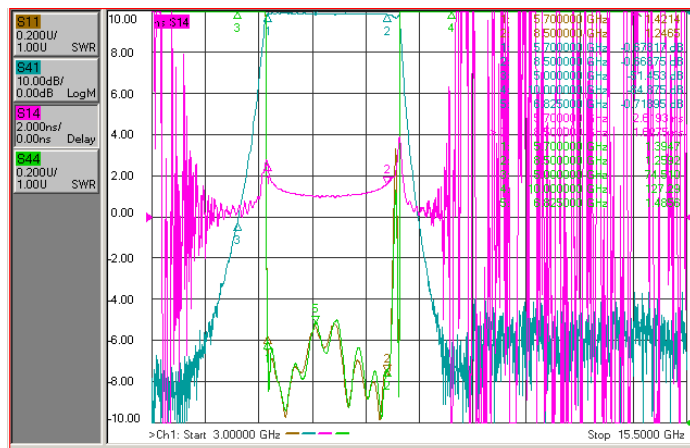

Configuration(mm)

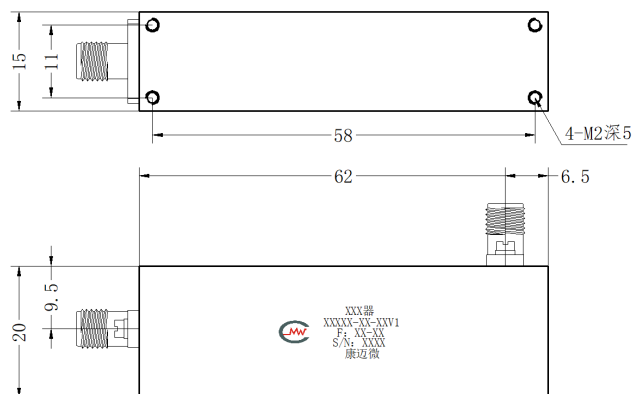

Typical test curve

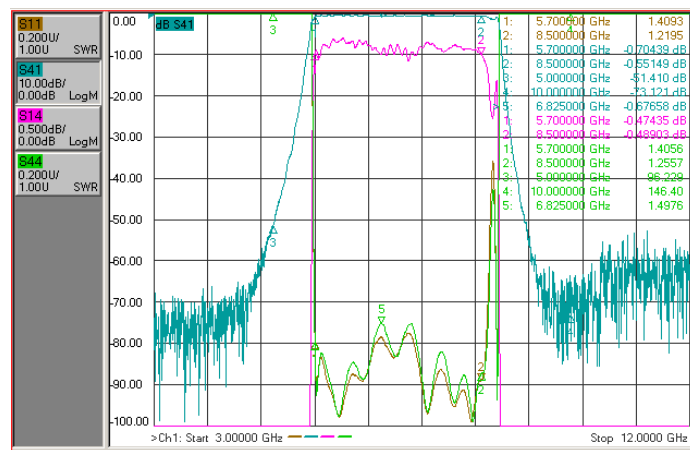

Note

- Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- If the temperature is higher than 125°C, consult with us before ordering.