

Main specifications

Parameters	/	Min	Typical	Max	Units
Stopband F		5510	~	5685	MHz
Stopband Rej.	$\geq$	50			dB
Passband		DC	~	5470	MHz
Passband		5725	~	8000	MHz
Passband IL				5.0	dB
Passband VSWR				1.8	


Other parameters

Connector	SMA-F or K
Connector material	Stainless steel
Impedance	50 Ω
Surface	Black baking paint
Power Capacity	10W Design assurance
Quality Grade	Industrial grade
ROHS	Compliant Available
Other	≥ 25 dB@5490MHz&5710MHz

Reference picture



Configuration(mm)

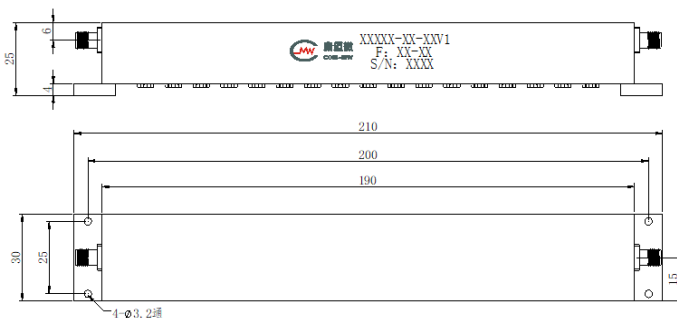

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 2 If the temperature is higher than 125°C, consult with us before ordering.

Functional diagram

