


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	63.5	~	65	MHz
Passband IL	/	/			6.5	dB
Ripple	/	/			0.8	dB
Rejection	60.25	MHz $\geq$	30			dB
Rejection	61	MHz $\geq$	16			dB


Other parameters

Connector	SMD
Impedance	50 Ω
Phase balance	$<10^\circ$
Work Temp.	-40~+70 $^\circ$ C
Storage Temp.	-55~+85 $^\circ$ C Design assurance
Other	Amplitude balance 0.5dB


Functional diagram

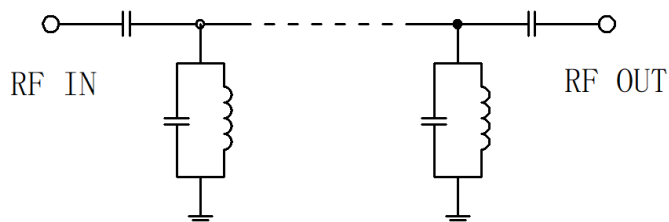


Reference picture



Configuration(mm)

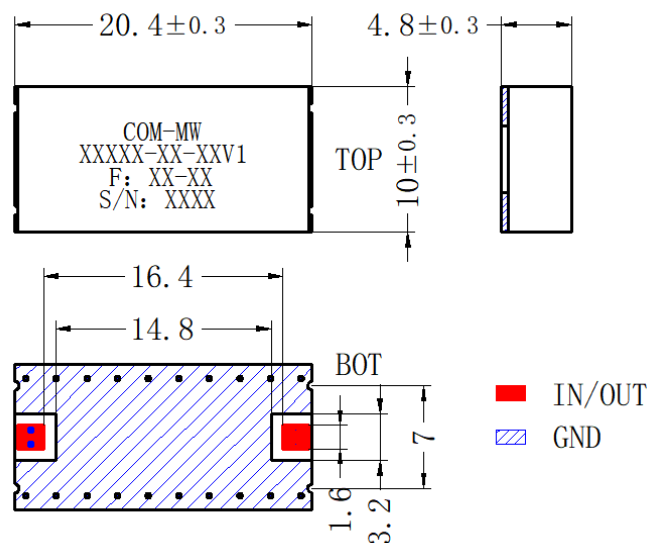

Suggested PCB Layout

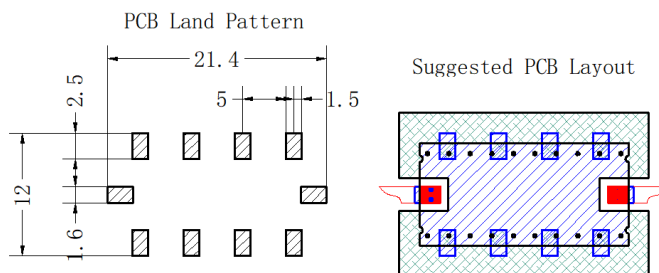

Note

- Please do not wash the product in the cleaning solution.,Please do not wash the product in the cleaning solution.