

Main specifications

Parameters	Min	Typical	Max	Units
Frequency	DC	~	1	GHz
IL		0.2		dB
VSWR		1.2		


Other parameters

Connector 1	SL16-J
Connector 2	N-K
Product shell material	Copper
Operation Temp.	-40~+85°C Design assurance

Reference picture



Configuration(mm)

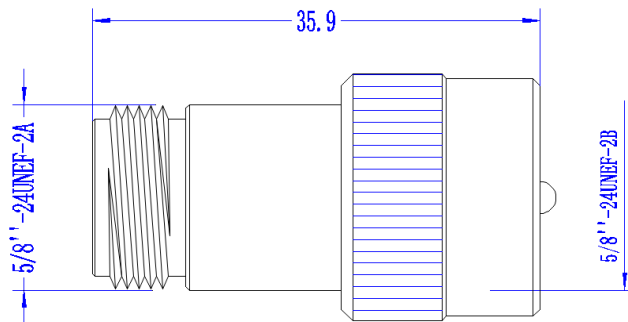

Note: The specifications and performance data contained in this data sheet are based on tests established by CMW.