


Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	240	~	420	MHz
Passband IL	/	/			1	dB
Ripple	/	/			0.7	dB
Rejection	480-2100	MHz ≥	40			dB
Passband VSWR	/	/			1.5	

Other parameters

Connector	Pin 0.5mm
Impedance	50Ω
Surface	silver-plate
Power Capacity	20W Design assurance
Operation Temp.	-55~+85°C Design assurance
Storage Temp.	-55~+85°C Design assurance

Configuration(mm)

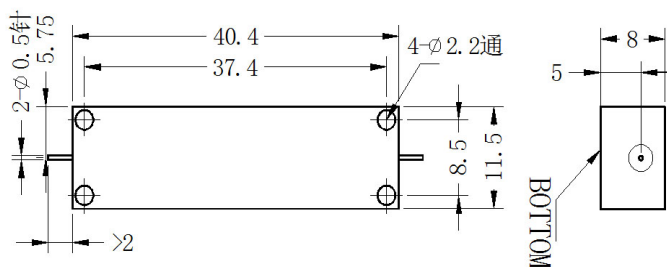

Note

- | | |
|---|--|
| 1 | Clean the surface of the product, do not soak the product in cleaning solution for cleaning. |
| 2 | If the temperature is higher than 125°C, consult with us before ordering. |

Note: The specifications and performance data contained in this data sheet are based on tests established by CMW.