



Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	1555	~	1695	MHz
Passband IL	/	/			4.0	dB
Ripple	/	/			1.0	dB
Rejection	DC-975	MHz $\geq$	60			dBc
Rejection	975-1475	MHz $\geq$	30			dBc
Rejection	1775-2275	MHz $\geq$	30			dBc
Rejection	2275-4000	MHz $\geq$	60			dBc
Passband VSWR	/	/			1.80	

Reference picture



Configuration(mm)

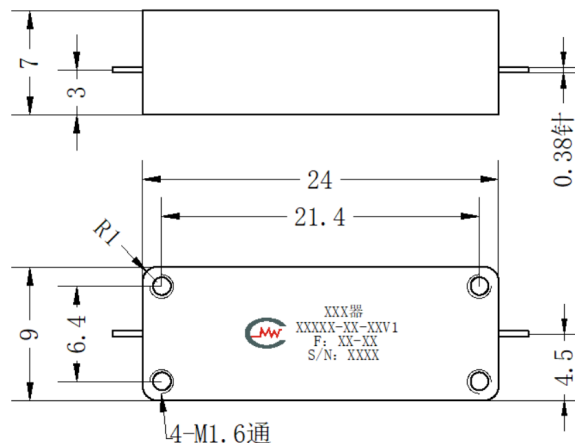

Other parameters

Connector	Pin 0.38mm
Impedance	50 Ω
Surface	silver-plate
Power Capacity	1W Design assurance
Bandwidth	-1dB $\geq$ 140MHz
Phase balance	$\pm 5^\circ$ @3只一组
Amplitude Balance	± 0.5 dB@3只一组
Operation Temp.	-40~+85°C Design assurance
Storage Temp.	-55~+85°C Design assurance

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 2 If the temperature is higher than 125°C, consult with us before ordering.