


Main specifications

Parameters	Frequ ency	/	Mi n	Typi cal	Ma x	Uni ts
Passband	/	/	13	~	18	GH z
Passband IL	/	/			2	dB
Rejection	DC-11	GHz $\geq$	70			dB
Rejection	20-25	GHz $\geq$	70			dB
Passband VSWR	/	/			1.8	


Other parameters

Connector	Pin 0.5mm
Impedance	50 Ω
Surface	silver-plate
Power Capacity	10W Design assurance
Operation Temp.	-40~+70°C Design assurance

Functional diagram

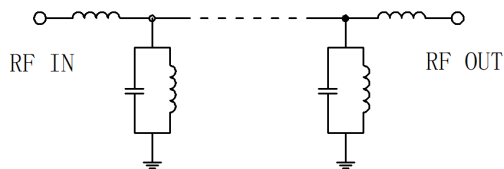

Configuration(mm)

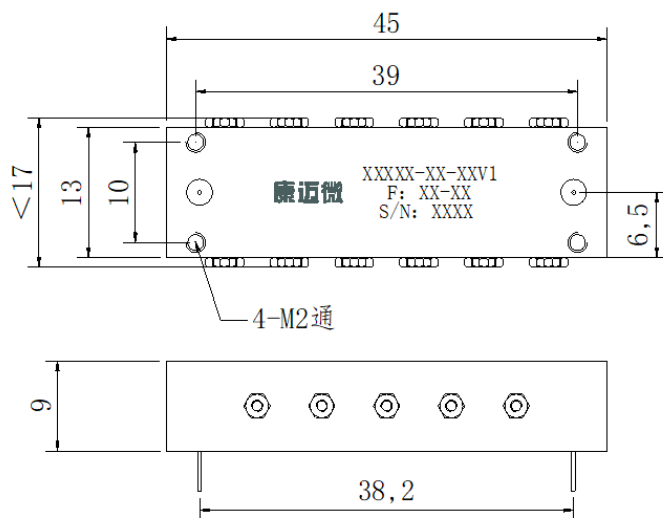

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 2 If the temperature is higher than 125°C, consult with us before ordering.