

Main specifications

Parameters	Frequency	/	Min	Typical	Max	Units
Passband	/	/	11.5	~	13	GHz
Passband IL	/	/			1.5	dB
Ripple	/	/			0.5	dB
Rejection	DC-10.5	GHz $\geq$	50			dBc
Rejection	14.5-20	GHz $\geq$	40			dBc
Rejection	20-22	GHz $\geq$	30			dBc
Passband VSWR	/	/			1.50	
Return loss	/	/				dB


Other parameters

Connector	Pin 0.38mm
Impedance	50 Ω
Surface	silver-plate
Power Capacity	10W Design assurance
Operation Temp.	-40~+70°C Design assurance
Storage Temp.	-55~+85°C Design assurance


Reference picture



Configuration(mm)

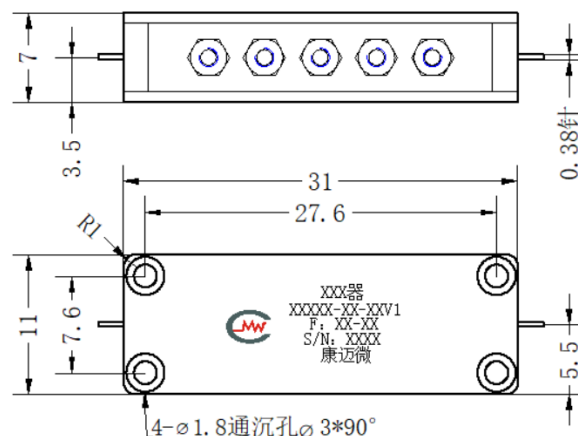

Typical test curve

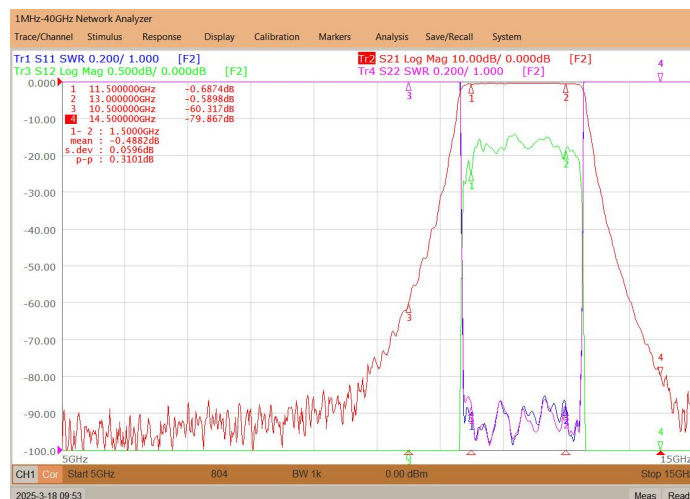

Note

- 1 Clean the surface of the product, do not soak the product in cleaning solution for cleaning.
- 2 If the temperature is higher than 125°C, consult with us before ordering.
- 3 /